


AM18 ALL METAL SERIES

ARTICLE PROPERTIES

SENSOR TYPE	Inductive sensor	CONNECTION TYPES (see table)
SIZE	M18x1	<ul style="list-style-type: none"> • cable PUR, 0.34 mm², 2 m** • M12 connector, A-coded
RATED OPERATING DISTANCE	see table	
NUMBER OF CONDUCTORS	2-wire / 3-wire (see table)	

** other cable lengths are available on request

MECHANICAL DATA

MOUNTING (mounting nuts included in delivery)	flush/non-flush (see table)
HOUSING	threaded cylindrical
MATERIAL HOUSING	stainless steel
MATERIAL SENSING SURFACE	stainless steel
TIGHTENING TORQUE LOCKING	50 Nm
STANDARD TEST	FE360
ATTENUATION COEFFICIENT	St37 = 1, V2A = 0.7, Al = 0.3

ELECTRICAL DATA

OPERATING VOLTAGE	DC: 10 ... 30 V DC AC: 20 ... 250 V AC
RATED OPERATING CURRENT	2-wire DC: ≤ 100 mA 2-wire AC: ≤ 200 mA 3-wire: ≤ 200 mA
SWITCHING FREQUENCY	see table
SWITCHING OUTPUT	see table
FUNCTION INDICATOR	yellow LED
HYSTERESIS	3 ... 15 %
TEMPERATURE DRIFT	±10 %
SHORT-CIRCUIT PROTECTION	yes
OVERLOAD RESISTANCE	yes
REVERSE POLARITY PROTECTION	yes

ENVIRONMENTAL CONDITIONS

PROTECTION CLASS	IP67	VIBRATION RESISTANCE (EN 60068-2-27)	55 Hz, 1 mm
AMBIENT TEMPERATURE	-25 ... 70 °C	SHOCK RESISTANCE (EN 60068-2-6)	30g/11 ms

STANDARDS AND DIRECTIVES

LOW-VOLTAGE SWITCHGEAR AND CONTROLGEAR	DIN EN IEC 60947-5-2:2021-04
---	------------------------------

APPROVALS



AM18 ALL METAL SERIES

DC 2-WIRE OUTPUT CABLE

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
Fi5-AM18-OD6L	flush	5 mm	DC NO (WD1)	120 Hz	see Fig. 1
Fi5-AM18-CD6L	flush	5 mm	DC NC (WD2)	120 Hz	see Fig. 1
Ni8-AM18-OD6L	non-flush	8 mm	DC NO (WD1)	100 Hz	see Fig. 2
Ni8-AM18-CD6L	non-flush	8 mm	DC NC (WD2)	100 Hz	see Fig. 2

DC 2-WIRE OUTPUT M12 CONNECTOR

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
Fi5-AM18-OD6L-Q12	flush	5 mm	DC NO (WD1)	120 Hz	see Fig. 3
Fi5-AM18-CD6L-Q12	flush	5 mm	DC NC (WD2)	120 Hz	see Fig. 3
Ni8-AM18-OD6L-Q12	non-flush	8 mm	DC NO (WD1)	100 Hz	see Fig. 4
Ni8-AM18-CD6L-Q12	non-flush	8 mm	DC NC (WD2)	100 Hz	see Fig. 4

AC 2-WIRE OUTPUT CABLE

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
Fi5-AM18-OSA3L	flush	5 mm	AC NO (WD3)	40 Hz	see Fig. 1
Fi5-AM18-CSA3L	flush	5 mm	AC NC (WD4)	40 Hz	see Fig. 1
Ni8-AM18-OSA3L	non-flush	8 mm	AC NO (WD3)	40 Hz	see Fig. 2
Ni8-AM18-CSA3L	non-flush	8 mm	AC NC (WD4)	40 Hz	see Fig. 2

AC 2-WIRE OUTPUT M12 CONNECTOR

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
Fi5-AM18-OSA3L-Q12	flush	5 mm	AC NO (WD3)	40 Hz	see Fig. 3
Fi5-AM18-CSA3L-Q12	flush	5 mm	AC NC (WD4)	40 Hz	see Fig. 3
Ni8-AM18-OSA3L-Q12	non-flush	8 mm	AC NO (WD3)	40 Hz	see Fig. 4
Ni8-AM18-CSA3L-Q12	non-flush	8 mm	AC NC (WD4)	40 Hz	see Fig. 4

AM18 ALL METAL SERIES

DC 3-WIRE OUTPUT CABLE

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
Fi5-AM18-OP6L	flush	5 mm	PNP NO (WD7)	120 Hz	see Fig. 1
Fi5-AM18-ON6L	flush	5 mm	NPN NO (WD8)	120 Hz	see Fig. 1
Fi5-AM18-CP6L	flush	5 mm	PNP NC (WD9)	120 Hz	see Fig. 1
Fi5-AM18-CN6L	flush	5 mm	NPN NC (WD10)	120 Hz	see Fig. 1
Ni8-AM18-OP6L	non-flush	8 mm	PNP NO (WD7)	100 Hz	see Fig. 2
Ni8-AM18-ON6L	non-flush	8 mm	NPN NO (WD8)	100 Hz	see Fig. 2
Ni8-AM18-CP6L	non-flush	8 mm	PNP NC (WD9)	100 Hz	see Fig. 2
Ni8-AM18-CN6L	non-flush	8 mm	NPN NC (WD10)	100 Hz	see Fig. 2

DC 3-WIRE OUTPUT M12 CONNECTOR

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
Fi5-AM18-OP6L-Q12	flush	5 mm	PNP NO (WD7)	120 Hz	see Fig. 3
Fi5-AM18-ON6L-Q12	flush	5 mm	NPN NO (WD8)	120 Hz	see Fig. 3
Fi5-AM18-CP6L-Q12	flush	5 mm	PNP NC (WD9)	120 Hz	see Fig. 3
Fi5-AM18-CN6L-Q12	flush	5 mm	NPN NC (WD10)	120 Hz	see Fig. 3
Ni8-AM18-OP6L-Q12	non-flush	8 mm	PNP NO (WD7)	100 Hz	see Fig. 4
Ni8-AM18-ON6L-Q12	non-flush	8 mm	NPN NO (WD8)	100 Hz	see Fig. 4
Ni8-AM18-CP6L-Q12	non-flush	8 mm	PNP NC (WD9)	100 Hz	see Fig. 4
Ni8-AM18-CN6L-Q12	non-flush	8 mm	NPN NC (WD10)	100 Hz	see Fig. 4

AM18 ALL METAL SERIES

DIMENSIONS

Fig. 1 Inductive sensor with cable (flush)

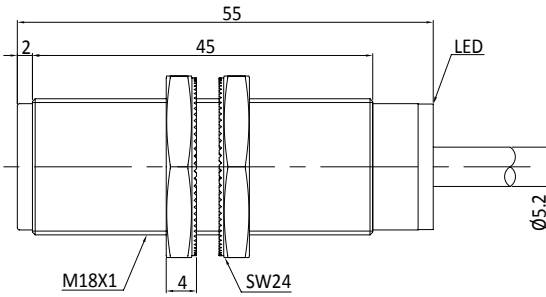


Fig. 2 Inductive sensor with cable (non-flush)

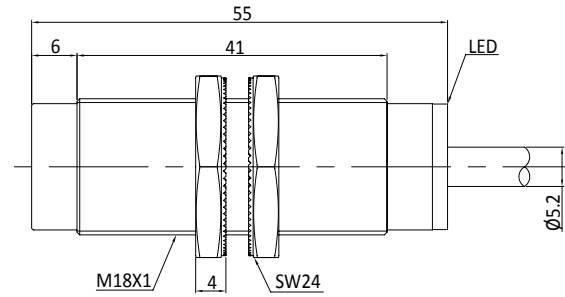


Fig. 3 Inductive sensor with M12 connector (flush)


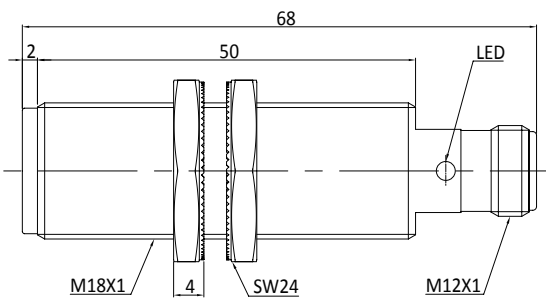



Fig. 4 Inductive sensor with M12 connector (non-flush)

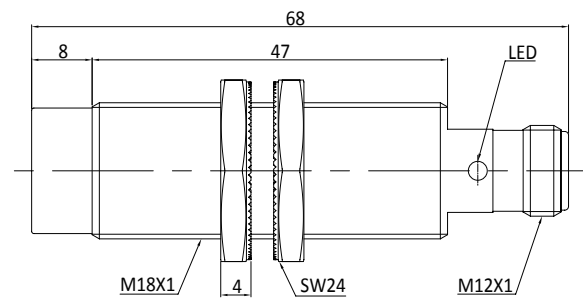


AM18 ALL METAL SERIES

WIRING DIAGRAMS (Note: 1 / 2 / 3 / 4 connector and terminals pin number Bn / Bu / Wh / Bk cable color)


WD1 DC 2-wire NO




WD2 DC 2-wire NC




WD3 AC 2-wire NO




WD4 AC 2-wire NC




WD5 AC / DC 2-wire NO




WD6 AC / DC 2-wire NC




WD7 DC 3-wire PNP NO




WD8 DC 3-wire NPN NO




WD9 DC 3-wire PNP NC

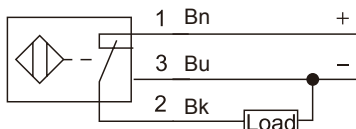


WD10 DC 3-wire NPN NC



WD11 DC 4-wire PNP NO + NC

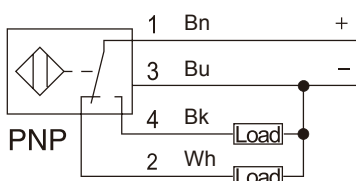

WD12 DC 4-wire NPN NO + NC




The information contained in this data sheet was compiled with the greatest possible care. Liability for correctness, completeness and topicality is limited to gross negligence.


AM18 ALL METAL SERIES

WIRING DIAGRAMS (Note: 1 / 2 / 3 / 4 connector and terminals pin number Bn / Bu / Wh / Bk cable color)

WD13 AC/DC 4-wire NO+NC

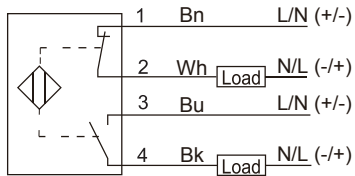

WD14 NAMUR 2-wire NC

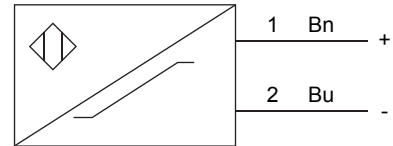

WD15 DC 4-wire 0-10V+0-20mA

