







- Multiple output modes
- Long detection distance
- Flexible installation method




Type	Distance	Beam	Output	Connection	Wiring
OS50-SL6 *M ¹⁾	60m	Laser	-----	Cable	Fig.1
OS50-SL6Q	60m	Laser	-----	Connetor	Fig.2
OS50-ELVP6 *M ¹⁾	60m	-----	PNP	Cable	Fig.3
OS50-ELVP6Q	60m	-----	PNP	Connetor	Fig.5
OS50-ELVN6 *M ¹⁾	60m	-----	NPN	Cable	Fig.4
OS50-ELVN6Q	60m	-----	NPN	Connetor	Fig.6
OS50-SL5 *M ¹⁾	60m	Laser	-----	Cable	Fig.7
OS50-ELVR5 *M ¹⁾	60m	-----	Relay	Connetor	Fig.8

OPERATING VOLTAGE	10-30VDC(NPN/PNP) 24...240VDC/AC(Relay)	AMBIENT TEMPERATURE OPERATION	-25°C...+55°C
RIPPLE VOLTAGE	±10% of U _B	AMBIENT TEMPERATURE STORAGE	-40°C...+70°C
LIGHT SOURCE TYPE	Laser	CIRCUIT PROTECTION	Short-circuit protection, reverse polarity protection, over-load protection
OUTPUT CHARACTERISTIC	PNP/NPN/Relay		
LOAD CURRENT	≤200mA(NPN/PNP) ≤3A(Relay)		
SWITCHING FREQUENCY	800Hz(NPN/PNP) 50Hz(Relay)	PROTECTION DEGREE	IP67
		HOUSING MATERIAL	PBT+ABS
ADJUSTMENT OF SENSITIVITY	Knob adjustment	CONNECTING TYPE	*m PVC cable /M12 connector

Connector



Sensitivity adjustment knob	
steady state indicator	Green
Output indicator	Yellow

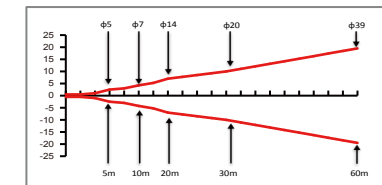

10...30V DC+	br/Bn
GND	bl/Bu

Fig.1




Fig.2




Fig.7




Fig.3




Fig.4




Fig.8




Fig.5





Fig.6




产品说明:

- 方形50*50尺寸，宽电压供电，继电器输出。
- 适用车库，仓储，物流，天车防撞等应用。

产品特点:

- 多种输出模式
- 长检测距离
- 灵活的安装方式



对射式



型号	检测距离	光源	输出方式	连接方式	接线图
OS50-SL6 *M ¹⁾	60m	激光	-----	线缆	图1
OS50-SL6Q	60m	激光	-----	M12 连接器	图2
OS50-ELVP6 *M ¹⁾	60m	-----	PNP	线缆	图3
OS50-ELVP6Q	60m	-----	PNP	M12 连接器	图5
OS50-ELVN6 *M ¹⁾	60m	-----	NPN	线缆	图4
OS50-ELVN6Q	60m	-----	NPN	M12 连接器	图6
OS50-SL5 *M ¹⁾	60m	激光	-----	线缆	图7
OS50-ELVR5 *M ¹⁾	60m	-----	继电器	M12 连接器	图8

注1)：*M表示线缆长度，单位米，型号中无*M默认线缆长度为2米。





技术参数

工作电压	10-30VDC(NPN/PNP) 24...240VDC/AC(继电器)	工作温度	-25°C...+55°C
纹波电压	±10% of U _s	环境温度	-40°C...+70°C
光源	红外光	保护电路	短路保护 反极性保护 输出过载保护
输出特性	NPN/PNP/继电器		
负载电流	≤200mA(NPN/PNP) ≤3A(继电器)	防护等级	IP67
开关频率	800Hz(NPN/PNP) 50HZ(继电器)	外壳	ABS+PBT
灵敏度调节	旋钮调节	连接方式	*m PVC线缆 /M12连接器

外形尺寸

线缆


连接器

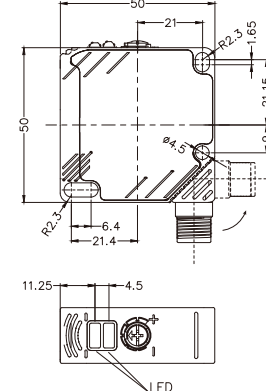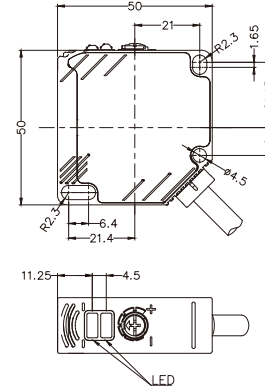

操作指示

灵敏度调节	
稳态指示灯	绿色
输出指示灯	黄色

OS50-SL6/SL5 光斑图 (mm)

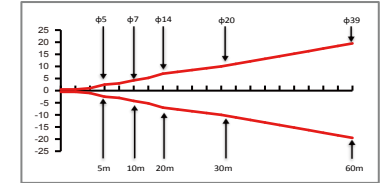

接线图




图1




图2




图7




图3




图4




图8




图5




图6

