

FBPN-1616UP-TS

ARTICLE PROPERTIES

PRODUCT TYPE	Wide form digital I/O modules	PRODUCT GROUP	IP20 Compact I/O
DESCRIPTION	IP20 wide form 16-channel digital input and 16-channel digital input / output configurable module, PNP, PROFINET, 24 V DC, IP20, DIN rail installation	PU	1 pc
		COUNTRY OF ORIGIN	CN

TECHNICAL DATA

COMMUNICATION PROTOCOL	PROFINET	NUMBER OF DIGITAL OUTPUTS	Max. 16
PROFINET I/O FEATURES	Integrierter 2-Port-Switch; Autonegotiation;MRP	OUTPUT TYPE	PNP
TRANSMISSION MEDIUM	Twisted pair S-UTP; 100 Ω; Cat. 5	OUTPUT VOLTAGE	24 V DC
TRANSMISSION RATE	10/100 Mbit/s (10 Mbit/s (ETHERNET protocols), 100 Mbit/s full duplex (PROFINET IO))	OUTPUT CURRENT	Max. 0.5 A per channel, total 4 A per module
BUS SEGMENT LENGTH (MAX.)	100 m	OUTPUT LOAD TYPES	Resistive loads, inductive loads, lamps
BUS NODE ADDRESS	Set by PLC configuration software	SWITCHING FREQUENCY	Max. 1 kHz (Resistive loads) Max. 1 Hz (Inductive loads) Max. 10 Hz (Lamps)
NUMBER OF DIGITAL INPUTS	Max. 32	CURRENT CONSUMPTION	65 mA
INPUT TYPE	PNP	PROCESS DATA LENGTH	Input 4 bytes, output 2 bytes
INPUT SIGNAL '0'	0 ... 5 V DC	FAULT DIAGNOSIS METHOD	LED, communication message
INPUT SIGNAL '1'	18 ... 30 V DC	FAULT DIAGNOSIS METHOD	LED, communication message
INPUT CURRENT PER CHANNEL FOR SIGNAL '1'	Typ. 4 mA	FAULT DIAGNOSIS METHOD	LED, communication message

CONNECTION DATA

WIRE CONNECTION	Plug-in terminal block	STRIPPED LENGTHS	8 ... 10 mm, 0.315 ... 0.394 in
CROSS SECTION	0.08 mm ² ... 2.5 mm ² , AWG 28 ... 14		

FBPN-1616UP-TS

ENVIRONMENTAL REQUIREMENTS

PROTECTION CLASS	IP20	ELECTRICAL FAST TRANSIENT (EFT)	Level A, per IEC 61000-4-4
MOUNTING TYPE	DIN-35mm rail	ELECTRO-STATIC DISCHARGE (ESD)	Level A, per IEC 61000-4-2
AMBIENT TEMPERATURE	-5 ... +60 °C	SURGE TEST	Level A, per IEC 61000-4-5
STORAGE TEMPERATURE	-25 ... +70 °C	VIBRATION RESISTANCE	4 g, per IEC 60068-2-6
RELATIVE HUMIDITY	95%, non-condensing	SHOCK RESISTANCE	15 g, per IEC 60068-2-27
OPERATING ALTITUDE	0 ... 2000 m / 0 ... 6562 ft	EU ROHS COMPLIANCE STATUS	Yes
POLLUTION DEGREE	2, per IEC 61131-2	MATERIAL COMPLIANCE	Compliant with REACH

GENERAL DATA


HOUSING MATERIAL	PPE	DIMENSIONS (H X W X D)	70 x 120 x 37.9 mm
WEIGHT	240 g	MTTF (25 °C)	90 years
COLOR	Dark gray	APPROVALS	CE

APPROVALS




FBPN-1616UP-TS

DIMENSIONS (mm)

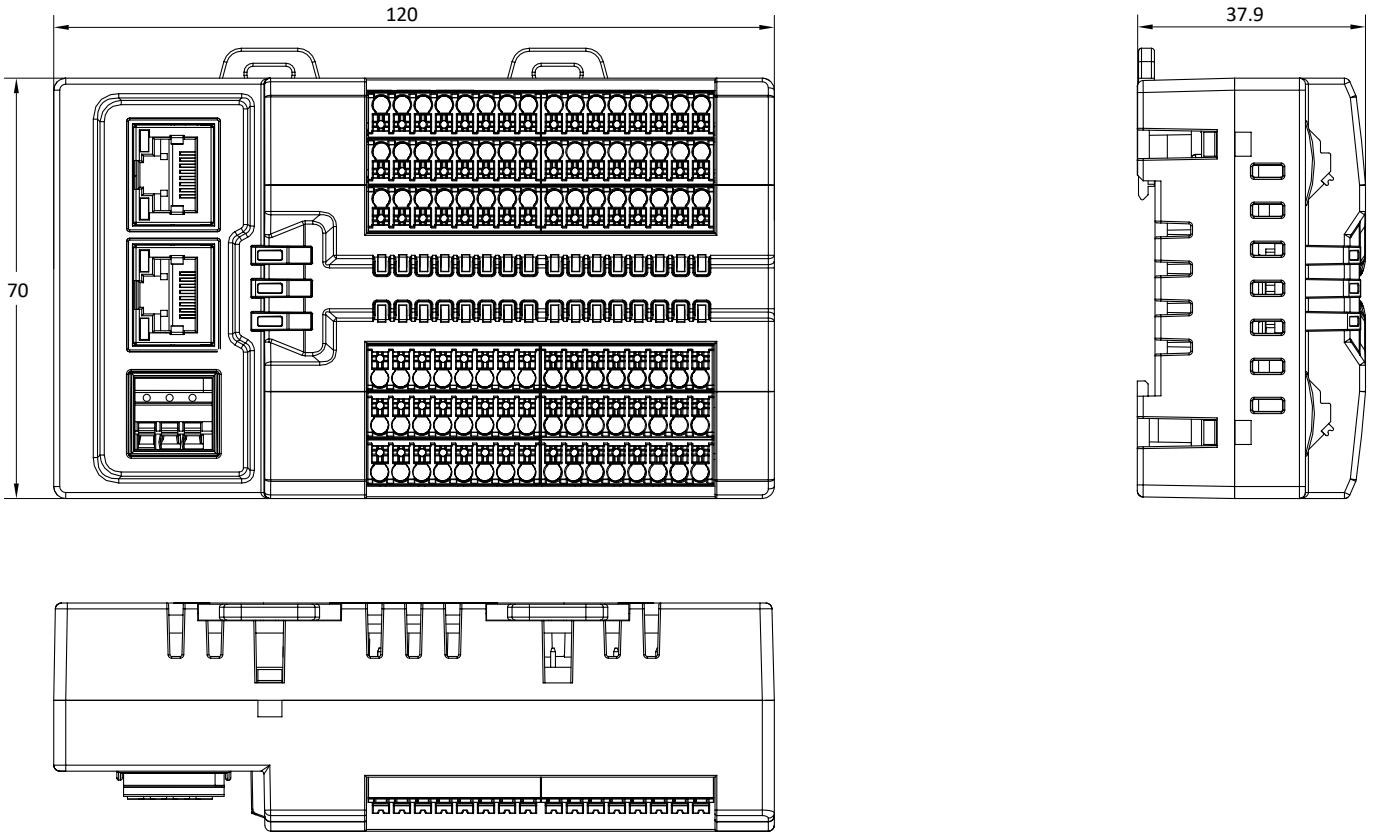

TERMINAL DEFINITION

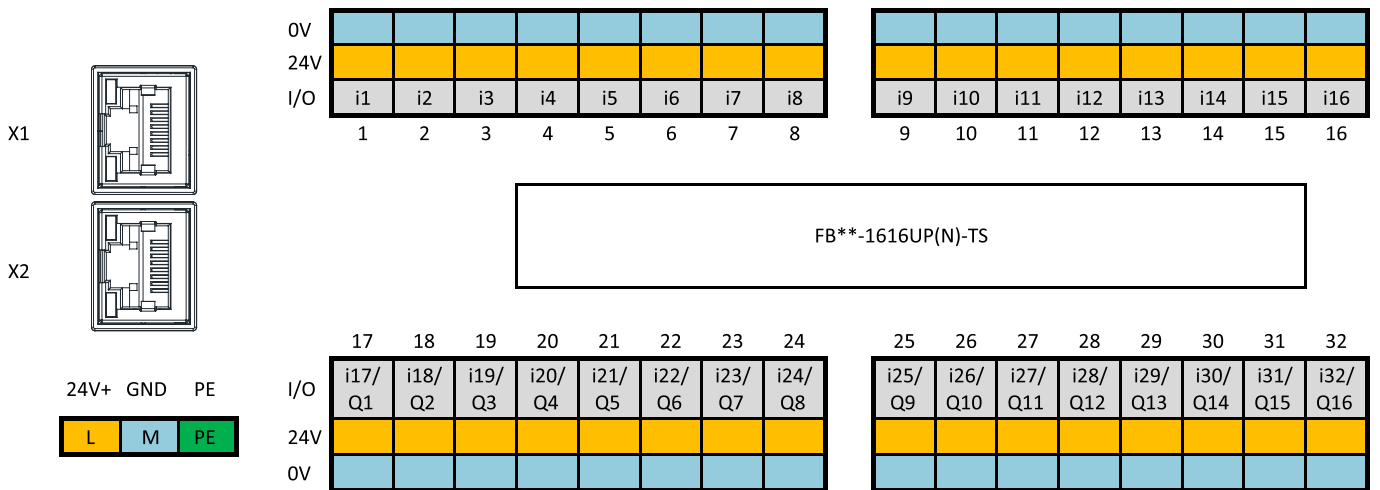

FBPN-1616UP-TS

SALES AND SERVICE

Tianjin Elco Automation Co., Ltd

No. 12, 4th XEDA Branch Road
Xiqing Economic-Technological Development Area
Tianjin 300385, P.R. China
Office Phone: 022 23788282
E-Mail: info@elco.cn
www.elco-holding.com.cn

Elco Industrie Automation GmbH

Benzstrasse 7
71720 Oberstenfeld,
Deutschland
Office Phone: +49 7062 / 6599-260
E-Mail: info@elco-automation.de
www.elco-automation.de

Elco Automation LLC

1097 Highway 101 South, Suite D-3 Greer
South Carolina 29651, USA
Office Phone: +1 864-581-7431
E-Mail: infousa@elcoautomation.com
www.elcoautomation.com

Elco Industrial Automation Pvt Ltd.

No 80, 1st Main, 2nd Cross, Royal Enclave,
Sidedahalli, Nagasandra Bangalore 560073, India
Office Phone: +91-7259931777
E-Mail: info@elcoautomation.in
www.elcoautomation.com

Elco Automation Korea Ltd.

706, 17 Daehak 4-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, Republic of Korea, 16226
Office Phone: +82-31-216-7890
E-Mail: sales@elcoautomation.co.kr
www.elcoautomation.com