



ES84

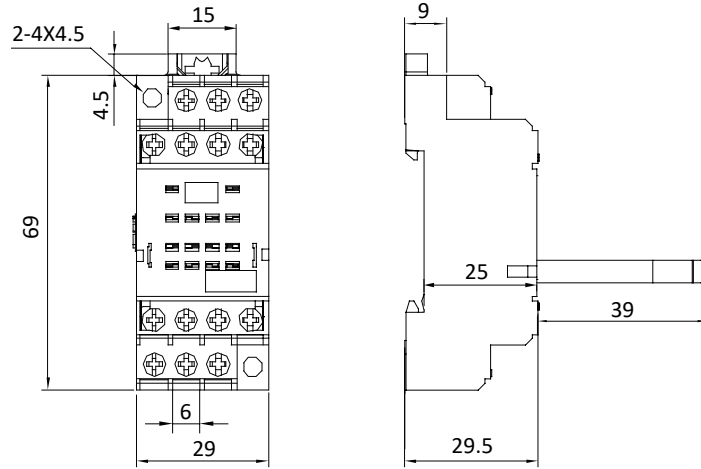

GENERAL DATA

RATED LOAD	6 A / 250 V	NOMINAL SCREW TORQUE	0.7 Nm
DIELECTRIC STRENGTH		CONDUCTOR CROSS SECTION	
- ALL TERMINALS / DIN RAIL	2.5 kV rms / 1 min	- SINGLE WIRE	4 mm ² / AWG 12 2 x 2.5 mm ² / AWG 14
- TERMINAL / TERMINAL	2.5 kV rms / 1 min	- MULTI WIRE (UN-CRIMPED)	0.34 mm ² / AWG 22 2.5 mm ² / AWG 14
SCREW DIMENSION	M3 Pozi slot	MOUNTING	TH35 (EN 60715) or back panel mounting
STORAGE TEMPERATURE (NO ICE)	-25 ... +55 °C	OPERATION TEMPERATURE	-25 ... +55 °C
WEIGHT	54 g	HOUSING MATERIAL	PA / PC

WIRING DIAGRAM



APPROVALS



ES84

SALES AND SERVICE**Tianjin Elco Automation Co., Ltd**

No. 12, 4th XEDA Branch Road
Xiqing Economic-Technological Development Area
Tianjin 300385, P.R. China
Office Phone: 022 23788282
E-Mail: info@elco.cn
www.elcoautomation.com.cn

Elco Industrie Automation GmbH

Benzstrasse 7
71720 Oberstenfeld,
Deutschland
Office Phone: +49 7062 / 6599-260
E-Mail: info@elco-automation.de
www.elco-automation.de

Elco Automation LLC

1097 Highway 101 South, Suite D-3 Greer
South Carolina 29651, USA
Office Phone: +1 864-581-7431
E-Mail: infousa@elcoautomation.com
www.elcoautomation.com

Elco Industrial Automation Pvt Ltd.

No 80, 1st Main, 2nd Cross, Royal Enclave,
Sidedahalli, Nagasandra Bangalore 560073, India
Office Phone: +91-7259931777
E-Mail: info@elcoautomation.in
www.elcoautomation.com

Elco Automation Korea Ltd.

706, 17 Daehak 4-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, Republic of Korea, 16226
Office Phone: +82-31-216-7890
E-Mail: sales@elcoautomation.co.kr
www.elcoautomation.com