

## M12S NAMUR SERIES

## ARTICLE PROPERTIES

<b>SENSOR TYPE</b>	Inductive sensor	<b>CONNECTION TYPES</b> ( <i>see table</i> )	
<b>SIZE</b>	M12x1	• cable	PVC, 0.25 mm <sup>2</sup> , 2 m**
<b>RATED OPERATING DISTANCE</b>	<i>see table</i>		
<b>NUMBER OF CONDUCTORS</b>	2-wire ( <i>see table</i> )		** other cable lengths are available on request

## MECHANICAL DATA

<b>MOUNTING</b> (mounting nuts included in delivery)	flush/non-flush ( <i>see table</i> )
<b>HOUSING</b>	threaded cylindrical
<b>MATERIAL HOUSING</b>	brass nickel-plated
<b>MATERIAL SENSING SURFACE</b>	PBT
<b>TIGHTENING TORQUE LOCKING</b>	10 Nm
<b>STANDARD TEST</b>	FE360
<b>ATTENUATION COEFFICIENT</b>	St37 = 1, V2A = 0.7, Al = 0.3

## ELECTRICAL DATA

<b>OPERATING VOLTAGE</b>	DC: 7.7 ... 9 V DC
<b>RATED OPERATING CURRENT</b>	2-wire: ≤ 1 mA (trigger) ≥ 2.2 mA (not trigger)
<b>SWITCHING FREQUENCY</b>	<i>see table</i>
<b>SWITCHING OUTPUT</b>	<i>see table</i>
<b>FUNCTION INDICATOR</b>	yellow LED
<b>HYSTERESIS</b>	3 ... 15 %
<b>TEMPERATURE DRIFT</b>	±10 %
<b>SHORT-CIRCUIT PROTECTION</b>	yes
<b>OVERLOAD RESISTANCE</b>	yes
<b>REVERSE POLARITY PROTECTION</b>	yes

## ENVIRONMENTAL CONDITIONS

<b>PROTECTION CLASS</b>	IP67	<b>VIBRATION RESISTANCE</b> (EN 60068-2-27)	55 Hz, 1 mm
<b>AMBIENT TEMPERATURE</b>	-25 ... 70 °C	<b>SHOCK RESISTANCE</b> (EN 60068-2-6)	30g/11 ms

## STANDARDS AND DIRECTIVES

<b>LOW-VOLTAGE SWITCHGEAR AND CONTROLGEAR</b>	DIN EN IEC 60947-5-2:2021-04
---	------------------------------

## APPROVALS



M12S NAMUR SERIES

DC 2-WIRE OUTPUT CABLE

Article number	Mounting	Rated operating distance Sn	Switching output (wiring diagram)	Switching frequency	Dimensions
Fi2-M12S-NE	flush	2 mm	NAMUR NC (WD14)	1000 Hz	see Fig. 1
Ni4-M12S-NE	non-flush	4 mm	NAMUR NC (WD14)	800 Hz	see Fig. 2

DIMENSIONS

Fig. 1 Inductive sensor with cable (flush)


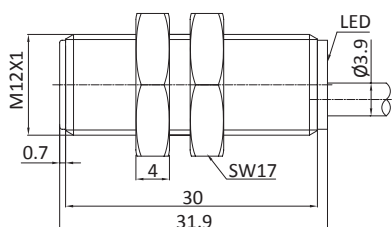



Fig. 1 Inductive sensor with cable (non-flush)

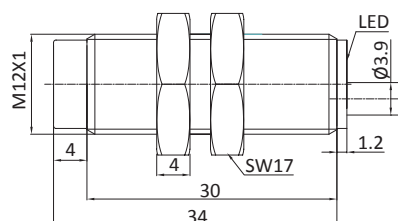


M12S NAMUR SERIES

WIRING DIAGRAMS (Note: 1 / 2 / 3 / 4 connector and terminals pin number Bn / Bu / Wh / Bk cable color)


**WD1 DC 2-wire NO**




**WD2 DC 2-wire NC**




**WD3 AC 2-wire NO**




**WD4 AC 2-wire NC**




**WD5 AC / DC 2-wire NO**




**WD6 AC / DC 2-wire NC**




**WD7 DC 3-wire PNP NO**

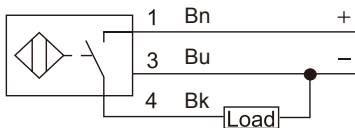


**WD8 DC 3-wire NPN NO**




**WD9 DC 3-wire PNP NC**

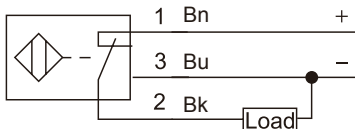


**WD10 DC 3-wire NPN NC**



**WD11 DC 4-wire PNP NO + NC**

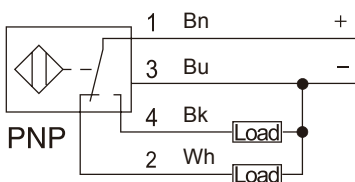

**WD12 DC 4-wire NPN NO + NC**




The information contained in this data sheet was compiled with the greatest possible care. Liability for correctness, completeness and topicality is limited to gross negligence.


M12S NAMUR SERIES

WIRING DIAGRAMS (Note: 1 / 2 / 3 / 4 connector and terminals pin number Bn / Bu / Wh / Bk cable color)

**WD13 AC/DC 4-wire NO+NC**

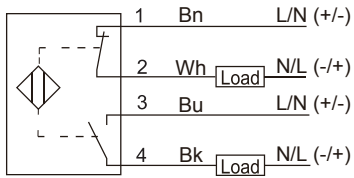

**WD14 NAMUR 2-wire NC**

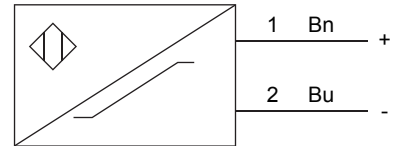

**WD15 DC 4-wire 0-10V+0-20mA**

