

LKHA-0032P-QA

ARTICLE PROPERTIES

PRODUCT TYPE	IO-Link IP20 hubs-32 digital I/O modules
DESCRIPTION	32DO, PNP, interface 4-Pin M12

ELECTRICAL CONNECTION

IO-LINK	1 × M12 A-CODE 4 Pin, Male	INPUT / OUTPUT	4 × 10 position I/O terminal blocks + 4 × 10 position Aux-plugs (24 V and 0 V) terminal blocks, Push-in spring connection, Pluggable
POWER SUPPLY	IO-Link interface + Power supply terminals (Us + Ua)		

ELECTRICAL PARAMETERS

INPUT CHANNELS	-	OUTPUT	32
INPUT SUPPLY CURRENT	-	OUTPUT CURRENT	Max. 500 mA per channel, sum 6 A
INPUT DELAY	-	OUTPUT TYPE	Lamps, solenoidvalve, etc.
MODULE COMMUNICATION INDICATOR	Green LED	OUTPUT FREQUENCY	Resistive load 100 Hz, Inductive load 5 Hz
POWER SUPPLY INDICATOR	Green LED	PROCESS DATA IN	0 bytes
SIGNAL STATUS INDICATOR	Green LED	PROCESS DATA OUT	4 bytes

DIAGNOSTICS

COMMUNICATION STATUS	LED indication, communication message	SHORT-CIRCUIT	LED indication
VOLTAGE DETECTION	LED indication	OVERLOAD	LED indication

FUNCTIONAL SAFETY

MTTF (40 °C)	90a
---------------------	-----

GENERAL DATA


PROTECTION CLASS	IP20	OPERATING TEMPERATURE	-25 ... +70 °C
DIMENSIONS	120 × 70 × 39 mm	STORAGE TEMPERATURE	-40 ... +85 °C
WEIGHT	204.95 g		

LKHA-0032P-QA

APPROVALS




DIMENSIONS

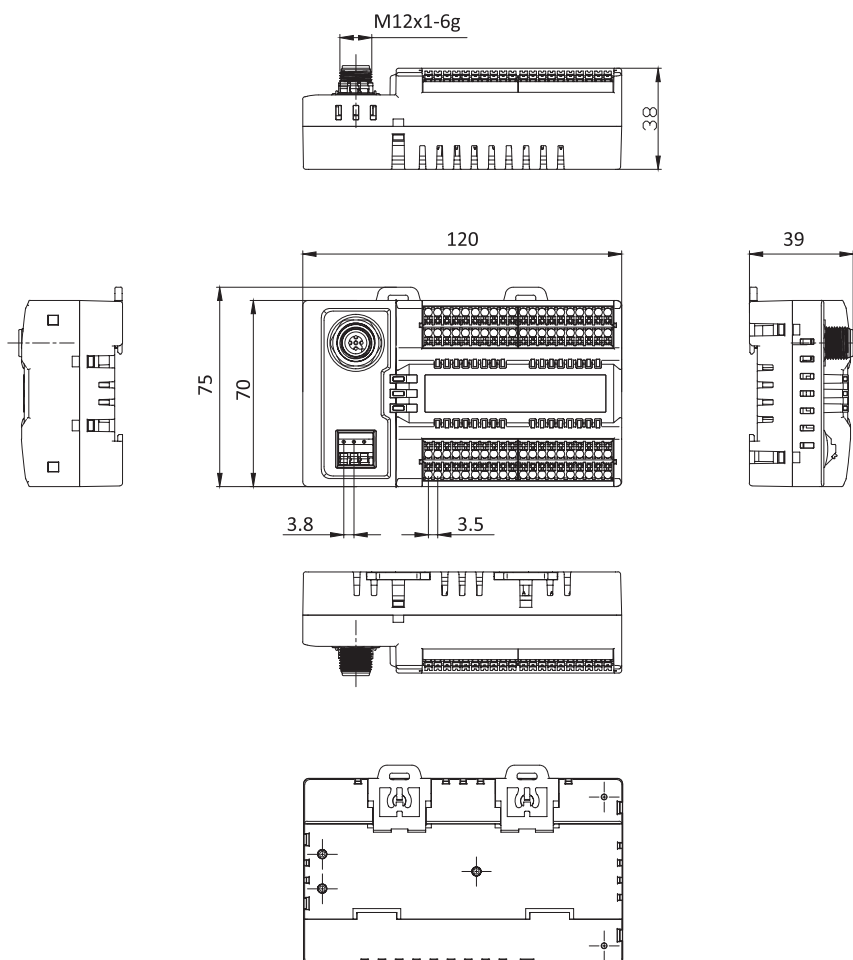


LKHA-0032P-QA

TERMINAL DEFINITION



- 1 - 1L 24 V+ (BN)
- 2 - nc
- 3 - 1M GND (BU)
- 4 - C/Q (BK)



2M	2M	2M	2M	2M	2M	2M	2M	2M	2M
2L	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	2M
1	2	3	4	5	6	7	8	9	10

2M	2M	2M	2M	2M	2M	2M	2M	2M	2M
2L	Q9	Q10	Q11	Q12	Q13	Q14	Q15	Q16	2M
11	12	13	14	15	16	17	18	19	20



1	2	3	4	5	6	7	8	9	10
2L	Q17	Q18	Q19	Q20	Q21	Q22	Q23	Q24	2M
2M	2M	2M	2M	2M	2M	2M	2M	2M	2M

11	12	13	14	15	16	17	18	19	20
2L	Q25	Q26	Q27	Q28	Q29	Q30	Q31	Q32	2M
2M	2M	2M	2M	2M	2M	2M	2M	2M	2M

LKHA-0032P-QA

SALES AND SERVICE

Tianjin Elco Automation Co., Ltd

No. 12, 4th XEDA Branch Road
Xiqing Economic-Technological Development Area
Tianjin 300385, P.R. China
Office Phone: 022 23788282
E-Mail: info@elco.cn
www.elco-holding.com.cn

Elco Industrie Automation GmbH

Benzstrasse 7
71720 Oberstenfeld,
Deutschland
Office Phone: +49 7062 / 6599-260
E-Mail: info@elco-automation.de
www.elco-automation.de

Elco Automation LLC

1097 Highway 101 South, Suite D-3 Greer
South Carolina 29651, USA
Office Phone: +1 864-581-7431
E-Mail: infousa@elcoautomation.com
www.elcoautomation.com

Elco Industrial Automation Pvt Ltd.

No 80, 1st Main, 2nd Cross, Royal Enclave,
Sidedahalli, Nagasandra Bangalore 560073, India
Office Phone: +91-7259931777
E-Mail: info@elcoautomation.in
www.elcoautomation.com

Elco Automation Korea Ltd.

706, 17 Daehak 4-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, Republic of Korea, 16226
Office Phone: +82-31-216-7890
E-Mail: sales@elcoautomation.co.kr
www.elcoautomation.com